


FOR FIRE
SPRINKLER
SYSTEMS

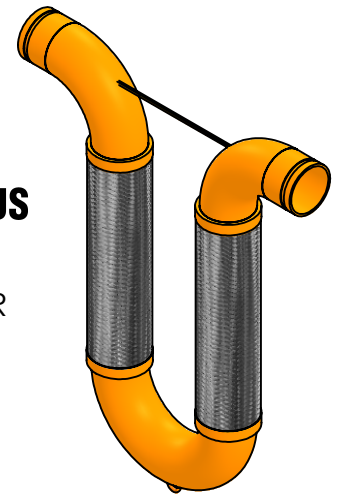

**MATERIALS OF
CONSTRUCTION**

- END FITTINGS - CARBON STEEL - SCH 40/STD WT
- HOSE & BRAID - STAINLESS STEEL - 300 SERIES
- 90° ELBOW - CARBON STEEL - SCH 40/STD WT
- 180° RETURN - CARBON STEEL - SCH 40/STD WT

NOTE*: HIGH PRESSURE HOSE AND BRAID
USED IN DESIGN PARAMETERS

NOTE: METRALOOPS 2" AND LARGER INSTALLED IN ANY ORIENTATION OTHER THAN HANGING
DOWN MUST HAVE THE 180° RETURN SUPPORTED. (SEE INSTALLATION INSTRUCTIONS.)

CONTACT FACTORY FOR ADDITIONAL SIZES AND MOVEMENTS. ALL DIMENSIONS IN INCHES.

QTY	SIZE	MODEL	MOVEMENT	A	B	PSI	WT (LBS)	PROJECT INFO
	4" (100mm)	MLUGHP320400	± 16"	40"	63"	300	70	
	5" (125mm)	MLUGHP320500	± 16"	44"	62"	300	107	
	6" (150mm)	MLUGHP320600	± 16"	48"	74-1/2"	300	167	

SUITABLE FOR USE IN DRY PIPE SYSTEMS
FOR TEMPERATURES TO -40°F.

CUSTOMER: _____

PROJECT: _____

ENGINEER: _____

REV.	DATE
2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 WWW.METRAFIRE.COM	
METRAFLEX FIRELOOP™ GROOVED ENDS, ±16" MOVEMENT, HP H&B	
DRAWN BY: JIMA	DATE: 7/7/2021
APPROVED:	DATE:
SCALE: NONE	DRAWING NUMBER: MLUGHP32