


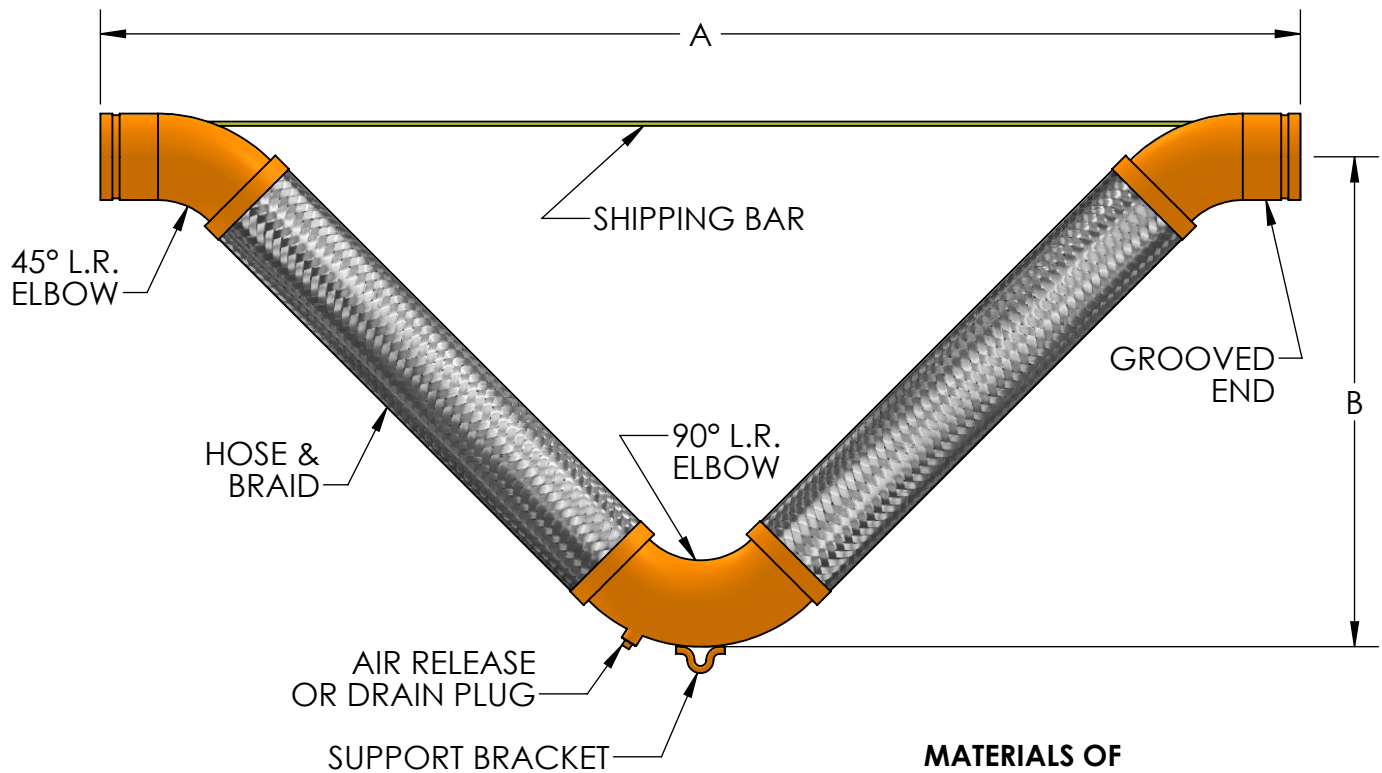

FOR FIRE
SPRINKLER
SYSTEMS

MATERIALS OF CONSTRUCTION

END FITTINGS - CARBON STEEL - SCH 40
HOSE & BRAID - STAINLESS STEEL - 300 SERIES
ELBOWS - CARBON STEEL - SCH 40

NOTE: FIREVOOP INSTALLED IN ANY ORIENTATION OTHER THAN HANGING DOWN MUST HAVE THE 180° RETURN SUPPORTED. (SEE INSTALLATION INSTRUCTIONS.)

CONTACT FACTORY FOR ADDITIONAL SIZES AND MOVEMENTS. ALL DIMENSIONS IN INCHES.

QTY	SIZE	MODEL	MOVEMENT	A	B	PSI	WT (LBS)	PROJECT INFO
	4" (100mm)	VLUGHP160400	±8"	72-3/8"	30-1/2"	300	38	
	6" (150mm)	VLUGHP160600	±8"	85-1/4"	35-1/2"	300	88	

SUITABLE FOR USE IN DRY PIPE SYSTEMS
FOR TEMPERATURES TO -40°F.

REV. 1	REMOVED 5" MODEL	DATE 10/01/2025
2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 WWW.METRAFIRE.COM		
METRAFLEX FIREVOOP™ GROOVED ENDS, ±8" MOVEMENT, HP H&B		
DRAWN BY: JIMA		DATE: 4/15/2021
APPROVED:		DATE:
SCALE: N/A	DRAWING NUMBER: VLUGHP16	

CUSTOMER: _____

PROJECT: _____

ENGINEER: _____