



MODEL FSUT12 **THREADED FLEXIBLE CONNECTOR**

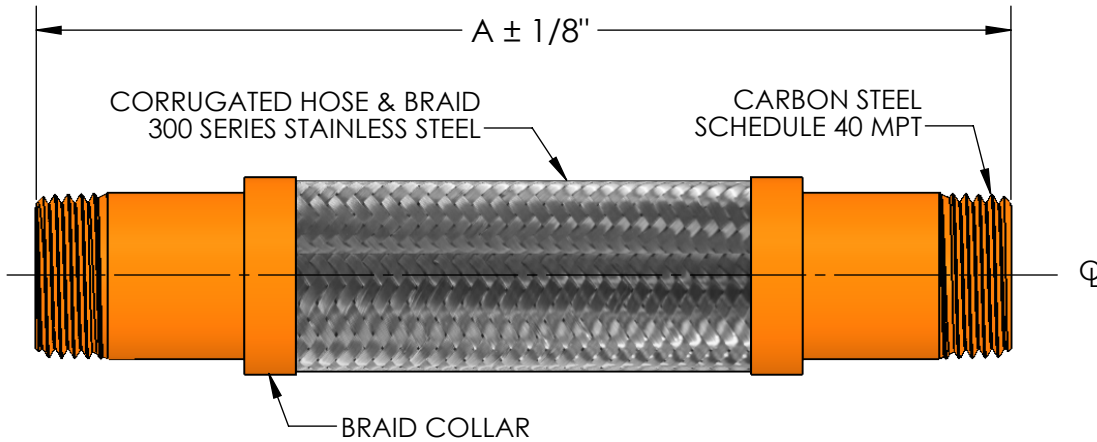

CONTACT FOR ADDITIONAL SIZES AND MOVEMENTS.

| QTY | PART NUMBER | PIPE SIZE | | A | PRESSURE RATING (PSI) | WEIGHT (LBS) | INTERMITTENT LATERAL OFFSET |
|-----|-------------|-----------|-----|---------|-----------------------|--------------|-----------------------------|
| | | INCH | MM | | | | |
| | FSUT120050 | 1/2" | 15 | 30-1/2" | 300 | 2 | ±12" |
| | FSUT120075 | 3/4" | 20 | 33-3/4" | 300 | 3 | ±12" |
| | FSUT120100 | 1" | 25 | 36-3/8" | 300 | 4 | ±12" |
| | FSUT120125 | 1-1/4" | 32 | 38-1/2" | 300 | 6 | ±12" |
| | FSUT120150 | 1-1/2" | 38 | 41-5/8" | 300 | 7 | ±12" |
| | FSUT120200 | 2" | 50 | 45-7/8" | 300 | 8 | ±12" |
| | FSUT120250 | 2-1/2" | 65 | 49-1/8" | 300 | 11 | ±12" |
| | FSUT120300 | 3" | 80 | 51-1/4" | 300 | 16 | ±12" |
| | FSUT120400 | 4" | 100 | 54-3/4" | 175 | 22 | ±12" |

SUITABLE FOR USE IN DRY PIPE SYSTEMS
TEMPERATURES TO -40°F.

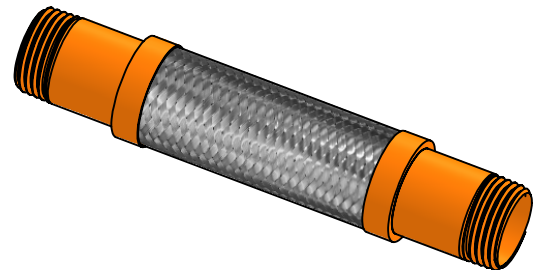

NSF 372 - LEAD FREE

The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content.

CUSTOMER: _____

PROJECT: _____

ENGINEER: _____

| | |
|---|-------------------------------|
| REV. | DATE |
| Metraflex for pipes in motion | |
| 2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM | |
| MODEL FSUT THREADED FLEXIBLE CONNECTOR | |
| DRAWN BY: JIMA | DATE: 10/6/2021 |
| APPROVED: | DATE: |
| SCALE: N/A | DRAWING NUMBER: FSUT12 |