



MODEL FSUT8 **THREADED FLEXIBLE CONNECTOR**

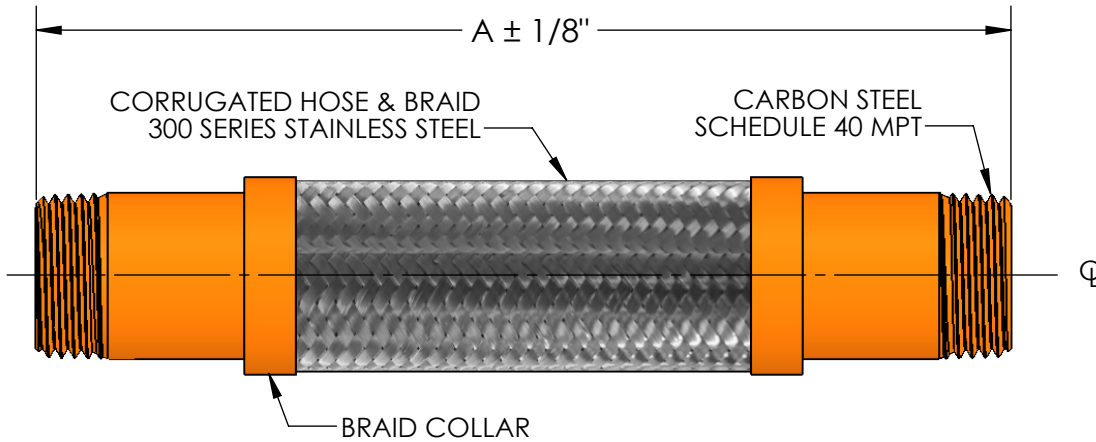

CONTACT FOR ADDITIONAL SIZES AND MOVEMENTS.

QTY	PART NUMBER	PIPE SIZE		A	PRESSURE RATING (PSI)	WEIGHT (LBS)	INTERMITTENT LATERAL OFFSET
		INCH	MM				
	FSUT80050	1/2"	15	25-5/8"	300	2	±8"
	FSUT80075	3/4"	20	28-1/2"	300	2	±8"
	FSUT80100	1"	25	30-3/8"	300	3	±8"
	FSUT80125	1-1/4"	32	32-1/2"	300	5	±8"
	FSUT80150	1-1/2"	38	34-1/2"	300	6	±8"
	FSUT80200	2"	50	37-7/8"	300	7	±8"
	FSUT80250	2-1/2"	65	42-1/8"	300	9	±8"
	FSUT80300	3"	80	43-1/4"	300	14	±8"
	FSUT80400	4"	100	47-3/4"	175	20	±8"

SUITABLE FOR USE IN DRY PIPE SYSTEMS
TEMPERATURES TO -40°F.

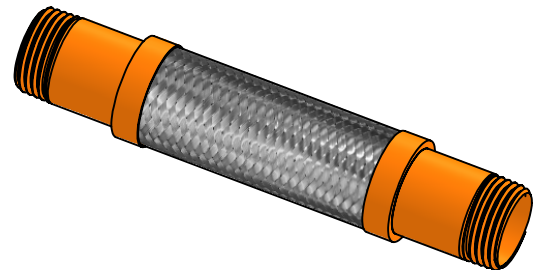

NSF 372 - LEAD FREE

The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content.

CUSTOMER: _____

PROJECT: _____

ENGINEER: _____

REV.	DATE
Metraflex for pipes in motion	
2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM	
MODEL FSUT THREADED FLEXIBLE CONNECTOR	
DRAWN BY: JIMA	DATE: 10/6/2021
APPROVED:	DATE:
SCALE: N/A	DRAWING NUMBER: FSUT8