



# **MODEL FSUT2** **THREADED FLEXIBLE CONNECTOR**

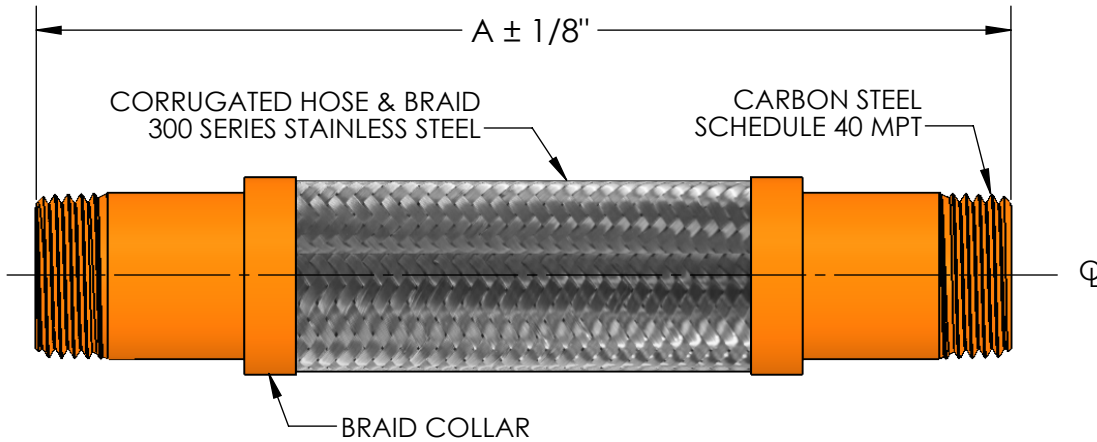

CONTACT FOR ADDITIONAL SIZES AND MOVEMENTS.

QTY	PART NUMBER	PIPE SIZE		A	PRESSURE RATING (PSI)	WEIGHT (LBS)	INTERMITTENT LATERAL OFFSET
		INCH	MM				
	FSUT20050	1/2"	15	13-7/8"	300	1	±2"
	FSUT20075	3/4"	20	16-5/8"	300	2	±2"
	FSUT20100	1"	25	19-1/8"	300	3	±2"
	FSUT20125	1-1/4"	32	19-5/8"	300	3	±2"
	FSUT20150	1-1/2"	38	22-1/8"	300	4	±2"
	FSUT20200	2"	50	22-3/8"	300	5	±2"
	FSUT20250	2-1/2"	65	24-3/8"	300	7	±2"
	FSUT20300	3"	80	25-1/4"	300	9	±2"
	FSUT20400	4"	100	26-3/4"	175	13	±2"

SUITABLE FOR USE IN DRY PIPE SYSTEMS  
TEMPERATURES TO -40°F.

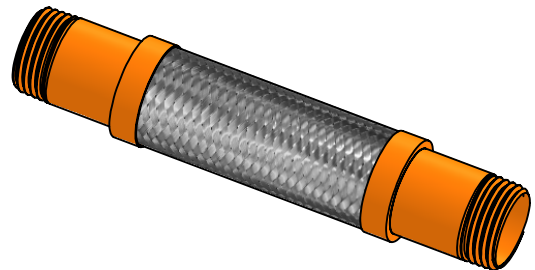

## **NSF 372 - LEAD FREE**

The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content.

CUSTOMER: \_\_\_\_\_

PROJECT: \_\_\_\_\_

ENGINEER: \_\_\_\_\_

REV.	DATE
<b>Metraflex</b> for pipes in motion	
2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM	
<b>MODEL FSUT</b> THREADED FLEXIBLE CONNECTOR	
DRAWN BY: <b>JIMA</b>	DATE: <b>10/6/2021</b>
APPROVED:	DATE:
SCALE: <b>N/A</b>	DRAWING NUMBER: <b>FSUT2</b>